

Singflo®

Xiamen Youme Electric Co.,Ltd
厦门优美沃电气有限公司
www.singflo.com/www.xmyoume.com

Providing easy way for your fluid transfer usage.



RV/MARINE PUMP



Non-Automatic Bilge Submersible Pump 非自动款舱底泵

Model	Volt	Flow rate	Current	Head	Wire	Outlet Dia
HYBP1-G350-01	12	350 GPH	1.8A	3.0M	1M	19mm/3/4"
HYBP2-G350-01	24	350 GPH	1.0A	3.0M	1M	19mm/3/4"
HYBP1-G500-01	12	500 GPH	2.2A	3.0M	1M	19mm/3/4"
HYBP2-G500-01	24	500 GPH	1.2A	3.0M	1M	19mm/3/4"
HYBP1-G750-01	12	750 GPH	2.5A	3.0M	1M	19mm/3/4"
HYBP2-G750-01	24	750 GPH	1.2A	3.0M	1M	19mm/3/4"
HYBP1-G1100-01	12	1100 GPH	3.0A	3.0M	1M	29mm/1-1/8"
HYBP2-G1100-01	24	1100 GPH	1.8A	3.0M	1M	29mm/1-1/8"



Dimension(PC)	Carton Dimension	N.W. / G.W
10*9*11.8cm	52*38*27cm(40pcs)	14kgs/16kgs

Model	Volt	Flow rate	Current	Head	Wire	Outlet Dia
HYBP1-G1500-01	12	1500 GPH	8.0A	5.0M	1M	29mm/1-1/8"
HYBP2-G1500-01	24	1500 GPH	4.0A	5.0M	1M	29mm/1-1/8"
HYBP1-G2000-01	12	2000 GPH	8.5A	6.0M	1M	29mm/1-1/8"
HYBP2-G2000-01	24	2000 GPH	5.0A	6.0M	1M	29mm/1-1/8"

Dimension(PC)	Carton Dimension	N.W. / G.W
13.6*13.6*18.2cm	71*29*39cm(20pcs)	23kgs/25.3kgs

Model	Volt	Flow rate	Current	Head	Wire	Outlet Dia
HYBP1-G3000-01	12	3000 GPH	12.0A	8.0M	1M	40mm/1-1/2"
HYBP2-G3000-01	24	3000 GPH	7.0A	8.0M	1M	40mm/1-1/2"
HYBP1-G3500-01	12	3500 GPH	14.0A	8.0M	1M	40mm/1-1/2"
HYBP2-G3500-01	24	3500 GPH	8.0A	8.0M	1M	40mm/1-1/2"
HYBP1-G3700-01	12	3700 GPH	16.0A	8.0M	1M	40mm/1-1/2"
HYBP2-G3700-01	24	3700 GPH	8.5A	8.0M	1M	40mm/1-1/2"
HYBP1-G4000-01	12	4000 GPH	18.0A	8.0M	1M	52mm/2"
HYBP2-G4000-01	24	4000 GPH	9.0A	8.0M	1M	52mm/2"

Dimension(PC)	Carton Dimension	N.W. / G.W
16*16*21cm	67.5*34.5*24cm(8pcs)	17kgs/19kgs

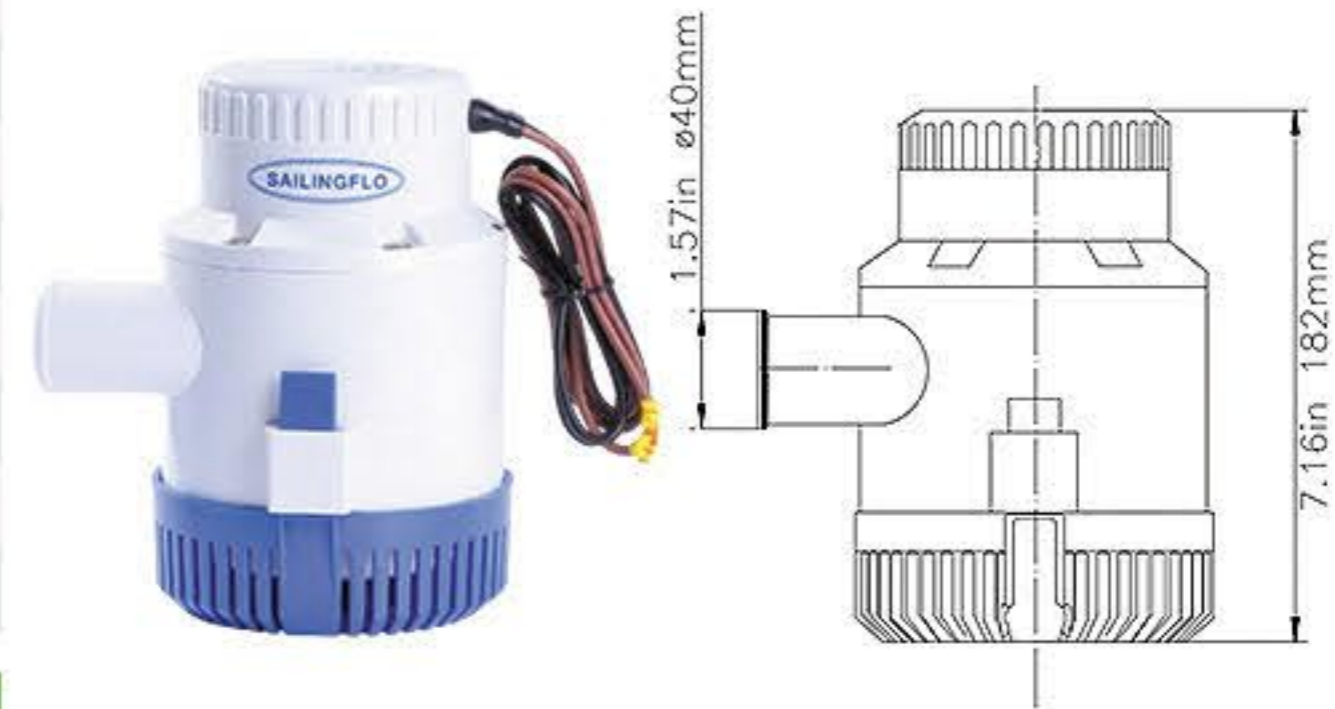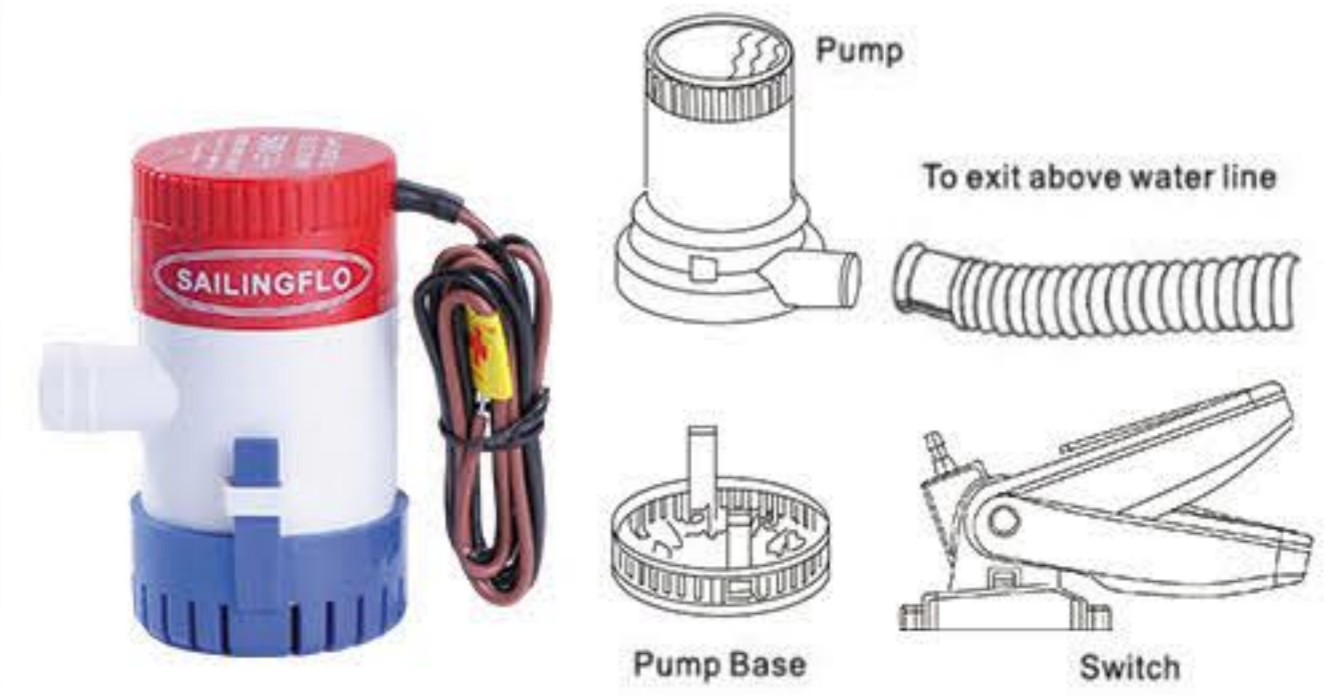

Automatic Bilge Submersible Pumps 自动款舱底泵

Model	Volt	Flow rate	Current	Head	Wire	Outlet Dia
HYBP1-G600-02	12	600 GPH	2.5A	3.5M	1M	19mm/3/4"
HYBP2-G600-02	24	600 GPH	1.5A	3.5M	1M	19mm/3/4"
HYBP1-G750-02	12	750 GPH	3.0A	4.0M	1M	19mm/3/4"
HYBP2-G750-02	24	750 GPH	1.6A	4.0M	1M	19mm/3/4"
HYBP1-G1100-02	12	1100 GPH	3.8A	5.0M	1M	29mm/1-1/8"
HYBP2-G1100-02	24	1100 GPH	2.0A	5.0M	1M	29mm/1-1/8"

Dimension(PC)	Carton Dimension	N.W. / G.W
15.8*9*11.5cm	48*34*26.6cm(20pcs)	9kgs/11.2kgs



Manual Hand Bilge Pump For Kayak 手动泵



Low Profile Non-auto Bilge Pump 非自动款舱底泵

Model	Volt	Flow rate	Current	Head	Wire	Outlet Dia
HYBP1-G900-04-01	12	900 GPH	3.5A	3.2M	1M	19mm/3/4"
HYBP2-G900-04-01	24	900 GPH	2.0A	3.2M	1M	25mm/1"
HYBP1-G1100-04-01	12	1100 GPH	4.3A	4.0M	1M	29mm/1-1/8"
HYBP2-G1100-04-01	24	1100 GPH	2.5A	4.0M	1M	
Dimension(PC)		Carton Dimension		N.W. / G.W		
24.7*9.3*10cm		51*49*43.5cm(40pcs)		18kgs/20kgs		




Low Profile Automatic Bilge pump 自动款舱底泵

Model	Volt	Flow rate	Current	Head	Wire	Outlet Dia
HYBP1-G900-04-02	12	900 GPH	3.5A	3.2M	1M	19mm/3/4"
HYBP2-G900-04-02	24	900 GPH	2.0A	3.2M	1M	25mm/1"
HYBP1-G1100-04-02	12	1100 GPH	4.3A	4.0M	1M	29mm/1-1/8"
HYBP2-G1100-04-02	24	1100 GPH	2.5A	4.0M	1M	



Bilge Pump Float Switch 舱底泵浮力开关

Model	HYBS-20-01
Max Amps 12volts	20A
Max Amps 24volts	10A
Max Amps 32volts	8A
Wire Length	1M
Wire Gauge Size	18AWG
Carton Dimension	55*42.5*32cm(48pcs)

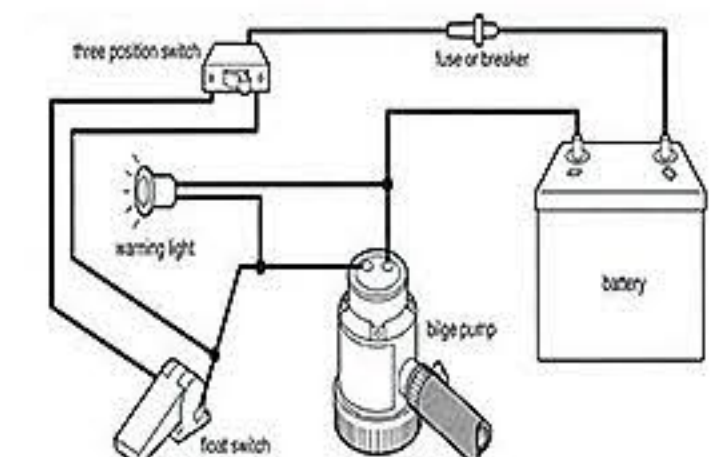


DC In-Line Air Blower 直流风机

Model	Volt	Air flow(cfm/cmh)	Amp Draw	Fuse(A)	Intake pipe Dia	N.W. / G.W
HYIB1-270-02	12	270/456	6.0A	10.0A	4"/105mm	0.8/0.9
HYIB2-270-02	24	270/456	3.0A	5.0A	4"/105mm	0.8/0.9
HYIB1-130-01	12	130/220	2.0A	5.0A	3"/76mm	0.5/0.6
HYIB2-130-01	24	130/220	1.3A	3.0A	3"/76mm	0.5/0.6
Specification		Carton Dimension		N.W. / G.W		
3" air blower		44.5*44.5*25.5cm(12pcs)		5.76kgs/8.06kgs		
4" air blower		47.5*43*30.5cm(12pcs)		9kgs/12kgs		



DC Shower Sump Pump System 淋浴泵

Model	Volt	Flow Lpm(gpm)	Current	Head	Wire	N.W. / G.W
HYBP1-G600-03	12	600 GPH	2.5A	3.5M	1M	1.23/1.40
HYBP2-G600-03	24	600 GPH	1.5A	3.5M	1M	1.23/1.40
HYBP1-G750-03	12	750 GPH	3.0A	4.0M	1M	1.23/1.40
HYBP2-G750-03	24	750 GPH	1.6A	4.0M	1M	1.23/1.40
Carton Dimension		N.W. / G.W				
65.5*35*37cm(9pcs)		11.3kgs/14.3kgs				

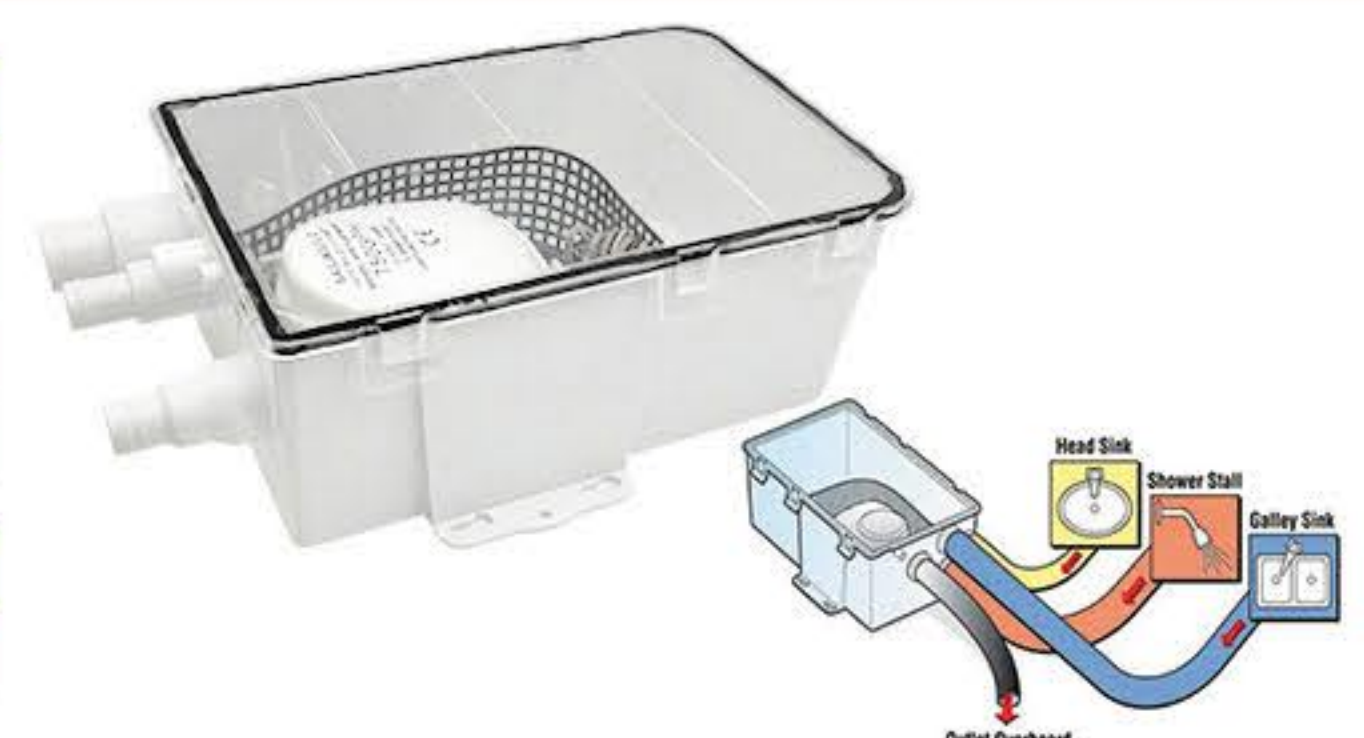

3 Chamber 3GPM Series Water Pump 3隔膜系列水泵



Carton Dimension	N.W. / G.W
64*31*28cm(8pcs)	15.2kgs/18.8kgs

Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw(A)	Diaphragm	Ports
HY-30451T	12	11.3/3.0	45(3.1)	8	Santoprene	1/2" -14FNPT
HY-30452T	24	11.3/3.0	45(3.1)	4	Santoprene	1/2" -14FNPT

4 Chamber Series Water Pump 4隔膜系列水泵



Model	Carton Dimension	N.W. / G.W
DC model	65*32*26.5cm(8pcs)	16.9kgs/20.3kgs
AC model	49*34.2*26.5cm(6pcs)	16.2kgs/19kgs

Remark: T is for female thread port, R is the male thread port

Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw(A)
HY-304551T/R	12	7.6/2.0	45(3.1)	6
HY-304551T/R	12	11.3/3.0	55(3.8)	7.5
HY-304552T/R	24	11.3/3.0	55(3.8)	3
HY-404551T/R	12	15.2/4.0	55(3.8)	20
HY-404552T/R	24	15.2/4.0	55(3.8)	10
HY-404553T/R	115	15.2/4.0	55(3.8)	1.8
HY-404554T/R	220	15.2/4.0	55(3.8)	1.0
HY-504551T/R	12	18.9/5.0	55(3.8)	20
HY-504552T/R	24	18.9/5.0	55(3.8)	10

5 Chamber Series Water Pump 5隔膜系列水泵



Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw(A)	Diaphragm	Ports	N.W. / G.W.
HY-30601T	12	11.3/3.0	60(4.1)	12	Santoprene	1/2" -14FNPT	2.9/3.1
HY-30602T	24	11.3/3.0	60(4.1)	6	Santoprene	1/2" -14FNPT	2.9/3.1
HY-40601T	12	15.2/4.0	60(4.1)	16	Santoprene	1/2" -14FNPT	2.9/3.1
HY-40602T	24	15.2/4.0	60(4.1)	7	Santoprene	1/2" -14FNPT	2.9/3.1
HY-55601T	12	20.8/5.5	60(4.1)	17.5	Santoprene	1/2" -14FNPT	2.9/3.1
HY-55602T	24	20.8/5.5	60(4.1)	10	Santoprene	1/2" -14FNPT	2.9/3.1
HY-55701T	12	20.8/5.5	70(4.8)	17.5	Santoprene	1/2" -14FNPT	2.9/3.1
HY-55702T	24	20.8/5.5	70(4.8)	8.6	Santoprene	1/2" -14FNPT	2.9/3.1
HY-40604T	220	15.2/4.0	60(4.1)	1	Santoprene	1/2" -14FNPT	2.9/3.1


7GPM Diaphragm Water Pump 5隔膜系列水泵



Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw(A)	Diaphragm	Ports
HY-70601T	12	26.5/7.0	60(4.1)	20	Santoprene	1/2" -14FNPT
HY-70602T	24	26.5/7.0	60(4.1)	10	Santoprene	1/2" -14FNPT
Carton Dimension				N.W. / G.W		
40*30*34cm(4pcs)				17.7kgs/19.5kgs		

0.75/1.0 Liter Pressurized Accumulator Tank 0.75/1.0L压力罐

Model	Volume	Pressure Psi(bar)	Pressure	Inlet/Outlet Dia
HYAT-075-125-01	0.75L/25FL OZ	125/8.6	10/(0.7)	1/2" MNPT
HYAT-100-125-01	1.0L/33.8FL OZ	125/8.6	10/(0.7)	1/2" MNPT

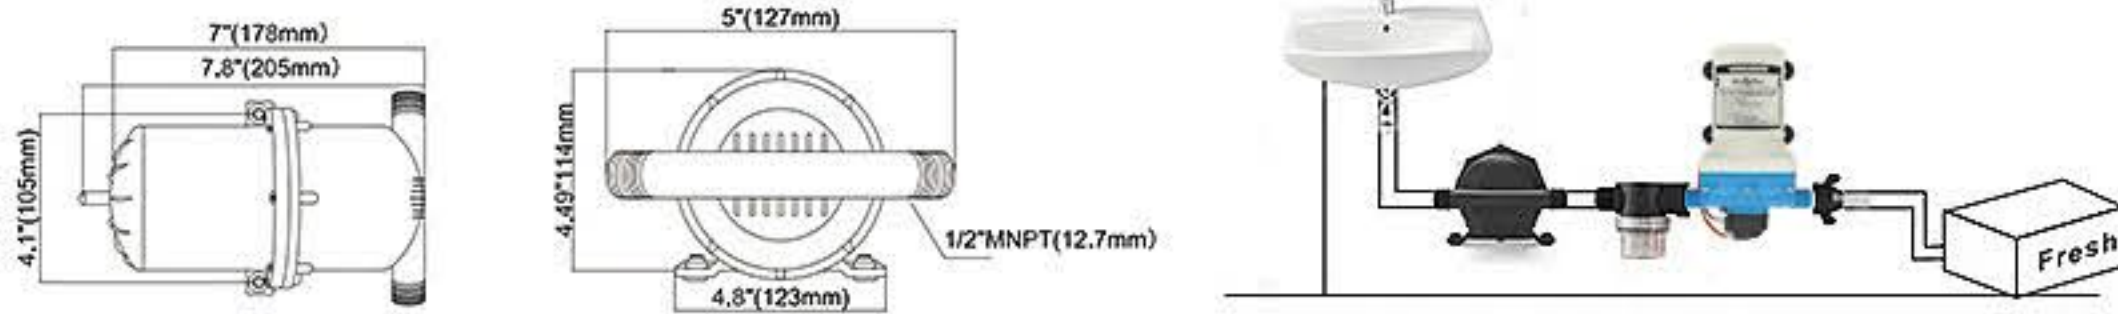

Pump With 8L Accumulator Kit 压力罐套装

Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw(A)
HY-304551T/R	12	11.3/3.0	55(3.8)	7.5
HY-304552T/R	24	11.3/3.0	55(3.8)	3
HY-404551T/R	12	15.2/4.0	55(3.8)	20
HY-404553T/R	115	15.2/4.0	55(3.8)	1.8
HY-504551T/R	12	18.9/5.0	55(3.8)	20



Pump With 5L Accumulator Kit 压力罐套装

Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw	Check Valve	Package	N.W. / G.W
FL-35H	12	12.5/3.3	35/2.4	7	EPDM	510*510*400	9.55/11.55
FL-34H	24	12.5/3.3	35/2.4	4	EPDM	510*510*400	9.55/11.55
FL-32H	230	12.5/3.3	35/2.4	0.8	EPDM	510*510*400	9.55/11.55
FL-40H	12	17.0/4.5	40/2.8	9.2	EPDM	510*510*400	9.55/11.55
FL-44H	24	17.0/4.5	40/2.8	5.6	EPDM	510*510*400	9.55/11.55
FL-43H	230	17.0/4.5	40/2.8	0.8	EPDM	510*510*400	9.55/11.55



Bilge Pump Hose Kit 舱底泵水管

Model	Description
HYPH-001-T	3/4" Dia Plumbing Kit, includes 5FT/152.4cm flexible PVC hose, 2pcs Stainless Steel Clamps and 1pcs Thru Hull fitting



9CM



19MM/3/4"

4.5CM



FLO Small Water Pressure Pump FLO系列微型直流隔膜泵

Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw	Ports	Wire Connctions
FLO-2201	12	2(0.5)	55(3.8)	1.8	3/8"barb	2-pin/Leads
FLO-2202	12	4.3(1.1)	35(2.4)	3.5	3/8"barb	2-pin/Leads
FLO-2202 with tap	12	4.3(1.1)	35(2.4)	3.5	3/8"barb	2-pin/Leads
FLO-2203	12	2.6(0.7)	70(4.8)	2.1	3/8"barb	2-pin/Leads
FLO-2203-1	12	3.1(0.8)	70(4.8)	2.2	3/8"barb	2-pin/Leads
FLO-2202A	12	4(1.07)	80(5.5)	2.6	3/8"barb	2-pin/Leads
FLO-2401	24	2(0.5)	55(3.8)	0.9	3/8"barb	2-pin/Leads
FLO-2402	24	3.8(1.0)	35(2.4)	1.7	3/8"barb	2-pin/Leads
FLO-2403	24	2.6(0.7)	70(4.8)	1.1	3/8"barb	2-pin/Leads
FLO-2402A	24	4(1.07)	80(5.5)	1.4	3/8"barb	2-pin/Leads

Carton Dimension : 56.5*38.5*36.5cm(50pcs) **N.W. / G.W :** 34kgs/36kgs



Small High Pressure Water Pump FL-320微型高压水泵

Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw	Ports	Wire Connctions
FL-3202	12	5.0(1.3)	80(5.5)	4.5	Quick Attach	2-pin/Leads
FL-3402	24	5.0(1.3)	80(5.5)	2.8	Quick Attach	2-pin/Leads
FL-3203	12	5.0(1.3)	100(7.0)	4.5	Quick Attach	2-pin/Leads
FL-3403	24	5.0(1.3)	100(7.0)	3	Quick Attach	2-pin/Leads
FL-3206	12	6.0(1.6)	65(4.5)	6	1/2" M thread	2-pin/Leads
FL-3406	24	6.0(1.6)	65(4.5)	2.5	1/2" M thread	2-pin/Leads

Carton Dimension : 55*40*28cm(30pcs) **N.W. / G.W :** 36kgs/38kgs



FL High Flow Water Pump FL系列高流量隔膜泵

Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw	Ports	Wire Connctions
FL-30	12	10(2.6)	17(1.2)	2.2	Quick Attach	2-pin/Leads
FL-31	24	10(2.6)	17(1.2)	1.5	Quick Attach	2-pin/Leads
FL-35	12	12.5(3.3)	35(2.4)	7	Quick Attach	2-pin/Leads
FL-34	24	12.5(3.3)	35(2.4)	4	Quick Attach	2-pin/Leads
FL-40	12	17(4.5)	40(2.8)	9.2	Quick Attach	2-pin/Leads
FL-60	12	17(4.5)	60(4.1)	15	Quick Attach	2-pin/Leads
FL-44	24	17(4.5)	40(2.8)	5.6	Quick Attach	2-pin/Leads
FL-33	115	12.5(3.3)	35(2.4)	0.5	Quick Attach	Any plug
FL-32	220	12.5(3.3)	35(2.4)	0.8	Quick Attach	Any plug
FL-41	115	17(4.5)	40(2.8)	0.5	Quick Attach	Any plug
FL-43	220	17(4.5)	40(2.8)	0.8	Quick Attach	Any plug
HY-40N	12	17.5(4.6)	40(2.8)	13	Quick Attach	2-pin/Leads
HY-45N	12	19(5.0)	45(3.10)	14	Quick Attach	2-pin/Leads
HY-100N	12	12.5(3.3)	100(7.0)	12	Quick Attach	2-pin/Leads

DC Carton Dimension : 64*36*22cm(10pcs) **AC Carton Dimension :** 64*39*22cm(10pcs)



Automatic Variable Speed Motor Driven Pumps 双电压自动变速泵

Model	Volt	Amp Draw	Flow Lpm(gpm)	Pressure Psi(bar)
FL-35N	12-24	8A	12.5/3.3	35PSI/2.4bar
FL-40N	12-24	10A	17/4.5	40PSI/2.8bar



DP High Pressure Water Pump DP系列高压水泵

Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw	Ports	Wire Connctions
DP-60	12	4.6(1.2)	60(4.1)	7	3/8" F NPT	2-pin/Leads
DP-60B	24	4.6(1.2)	60(4.1)	4	3/8" F NPT	2-pin/Leads
DP-80	12	5.5(1.5)	80(5.5)	8	3/8" F NPT	2-pin/Leads
DP-100	12	5.5(1.5)	100(7.0)	9	3/8" F NPT	2-pin/Leads
DP-120	12	5.5(1.5)	120(8.3)	9.5	3/8" F NPT	2-pin/Leads
DP-120B	24	5.5(1.5)	120(8.3)	4.5	3/8" F NPT	2-pin/Leads
DP-160	12	5.5(1.5)	160(11.0)	10.5	3/8" F NPT	2-pin/Leads
DP-160B	24	5.5(1.5)	160(11.0)	4.2	3/8" F NPT	2-pin/Leads
DP-100M	220	5.5(1.5)	100(7.0)	0.6	3/8" F NPT	Any plug
DP-160S	120	5.5(1.5)	160(11.0)	1	3/8" F NPT	Any plug
DP-120M	220	5.5(1.5)	120(8.3)	0.5	3/8" F NPT	Any plug
DP-160M	220	5.5(1.5)	160(11.0)	0.55	3/8" F NPT	Any plug

DC Carton Dimension : 63*27.5*22cm(10pcs) AC Carton Dimension : 64*36*22.5cm(10pcs)



High Pressure / High Flow Water Pump 高压高流量隔膜泵

Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw	Ports	Wire Connctions
FL-200	12	10(2.6)	200(13.8)	13	Quick Attach	2-pin/Leads
FL-200B	24	10(2.6)	200(13.8)	9	Quick Attach	2-pin/Leads
FL-200S	115	10(2.6)	200(13.8)	1	Quick Attach	Any plug
FL-200M	220	10(2.6)	200(13.8)	0.6	Quick Attach	Any plug
FL-55	12	20(5.3)	55(3.8)	15	Quick Attach	2-pin/Leads
FL-55B	24	20(5.3)	55(3.8)	9	Quick Attach	2-pin/Leads

Carton Dimension : 58*36*27.5cm(8pcs) N.W. / G.W : 30kgs/32kgs



12LPM Oil Gear Pump 齿轮泵

Model	Volt	Flow Lpm(gpm)	Gear	Amp Draw	Max.Amp Draw
FP-12	12	12/3.2	Copper	7A	10A
FP-24	24	12/3.2	Copper	4A	6A

Carton Dimension : 41.5*25*22.8cm (8pcs) N.W. / G.W : 19.6kgs/21kgs



23LPM Flexible Impeller Pump 叶轮泵

Model	Volt	Flow Lpm(gpm)	Impeller	Amp Draw	Carton dimension
FIP-3200-12	12	23/6	Rubber&Copper	14A	69*23*24cm(10pcs)
FIP-3200-24	24	23/6	Rubber&Copper	7A	21.6/23.6kgs



12/24v DC Sewage Pump/Macerator Pump 污水泵

Model	Volt	Flow Lpm(gpm)	Pressure Psi(bar)	Amp Draw	Packing Size	N.W. / G.W.
FL-65A	12	49/13	NO	11.3A	71*31.5*24cm	22kg/24kg
FL-65B	24	49/13	NO	5A	71*31.5*24cm	22kg/24kg

Model	Volt	Max Draw	Max Flow Lpm(gpm)	Carton dimension
HYMP1-4501	12	12A	45LPM/12GPM	46*33.5*24.5cm (6pcs)
HYMP2-4501	24	6A	45LPM/12GPM	16kgs/18kgs





MANUFACTURER FOR MARINE/RV PUMPS

www.singflo.com/www.xmyoume.com



XIAMEN YOUME ELECTRIC CO., LTD.

Youme company was established in 2010, specializing in the development, production, and sales of pumps. The main products include diaphragm pumps, bilge pumps, bottled water dispenser pumps, oil gear pumps, magnetic pumps, adblue pumps, solar pumps, etc. The pumps are widely used in RV & marine applications, food and beverage, medical equipment, industrial & agricultural sectors, household appliances, solar water energy systems, environmental protection, measurement analysis, printing, inkjet technology and so on. The products are certified with ISO 9001, CE, and RoHS, and are successfully exported to overseas markets such as North America, Europe, Australia, etc.

Youme centers on promoting its own Singflo brand worldwide, while also providing high-quality goods based on customer needs and offering efficient service for OEM & ODM projects. With a foundation of professional services, focused scientific research, and an evolving corporate culture, Youme strives to become a world-class leader in the RV & Marine industry.

The company is committed to developing greener and more convenient products, contributing to a better life for humanity.

CONTACT US!

 6F NO.1 Tianan Industry Zone, No.143 Yuehua Road,Huli District, Xiamen, China (361006)

 +86 592 5612511 / 86-15985811046

 +86 592 5626361

 86-13599509863

 E-mail: sales@singflo.com / singflo@singflo.com

